

CSE 134B Web Client Languages Lecture # 5

## Part II More on JavaScript

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Pre-DOM Model

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Two Object Models?

- An object model defines the interface to the various aspects of the browser and document that can be manipulated by JavaScript.
- In JavaScript, two primary object models are employed
  1. a browser object model (BOM)
    - The BOM provides access to the various characteristics of a browser such as the browser window itself, the screen characteristics, the browser history and so on.
  2. document object model (DOM).
    - The DOM on the other hand provides access to the contents of the browser window, namely the document including the various HTML elements ranging from anchors to images as well as any text that may be enclosed by such elements.

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## The Ugly Truth

- Unfortunately, the division between the DOM and the BOM at times is somewhat fuzzy and the exact document manipulation capabilities of a particular browser's implementation of JavaScript vary significantly.

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## The Big Picture

- Looking at the "big picture" of all various aspects of JavaScript including its object models. We see four primary pieces:
  - The core JavaScript language (e.g. data types, operators, statements, etc.)
  - The core objects primarily related to data types (e.g. Date, String, Math, etc.)
  - The browser objects (e.g. Window, Navigator, Location, etc.)
  - The document objects (e.g. Document, Form, Image, etc.)

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

**JavaScript Language and Built-in Objects**  
(standardized under ECMA-262)

Core Language Definition (Statements, operators, expressions, etc.)			Math
String	Boolean	Number	Date
Array	Object	Function	RegExp

**Browser Object Model**  
(unstandardized)

Window

Document

[frames]

History

Location

Navigator

Document Object Model  
 Traditional or DOM Flavor

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Four Five Models

- By studying the history of JavaScript we can bring some order to the chaos of competing object models. There have been four distinct object models used in JavaScript including:
  1. Traditional JavaScript Object Model (NS 2 & IE 3)
  2. Extended Traditional JavaScript Object Model (NS 3)
  3. Dynamic HTML Flavored Object Models
    1. a. IE 4
    2. b. NS 4
  4. Traditional Browser Object Model + Standard DOM (Ffox,Chrome,etc.)
  5. HTML5 Model!

Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Traditional Object Model

Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Overview of Core Objects

Object	Description
Window	The object that relates to the current browser window.
Document	An object that contains the various HTML elements and text fragments that make up a document. In the traditional JavaScript object model, the <b>Document</b> object relates roughly the HTML <b>&lt;body&gt;</b> tag.
Frames[]	An array of the frames in the Window contains any. Each frame in turn references another <b>Window</b> object that may also contain more frames.
History	An object that contains the current window's history list, namely the collection of the various URLs visited by the user recently.
Location	Contains the current location of the document being viewed in the form of a URL and its constituent pieces.
Navigator	An object that describes the basic characteristics of the browser, notably its type and version.

Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## Document Object

- The **Document** object provides access to page elements such as anchors, form fields, and links as well as page properties such as background and text color.
- Consider
  - `document.alinkColor`, `document.bgColor`, `document.fgColor`, `document.URL`
  - `document.forms[ ]`, `document.links[ ]`, `document.anchors[ ]`
- We have also used the methods of the **Document** object quite a bit
  - `document.write( )`, `document.writeln( )`, `document.open( )`, `document.close( )`


Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## Object Access by Document Position

- HTML elements exposed via JavaScript are often placed in arrays or collections. The order of insertion into the array is based upon the position in the document.
- For example, the first **<form>** tag would be in `document.forms[0]`, the second in `document.forms[1]` and so on.
- Within the form we find a collection of `elements[ ]` with the first **<input>**, **<select>** or other form field in `document.forms[0].elements[0]` and so on.
- As arrays we can use the `length` property to see how many items are in the page.
- The downside of access by position is that if the tag moves the script may break


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


CSE 134B Web Client Languages Lecture # 5

## Object Access by Name

- When a tag is named via the **name** attribute (HTML 4.0 - **<a>**, **<img>**, embedded objects, form elements, and frames) or by **id** attribute (pretty much every tag) it should be scriptable.
- Given
 

```
<form id="myform" name="myform">
  <input type="text" name="username" id="username">
</form>
```

we can access the form at `window.document.myform` and the first field as `window.document.myform.username`


Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## Object Access by Associative Array

- The collection of HTML objects are stored associatively in the arrays.
- Given the form named "myform" we might access it using  
`window.document.forms["myform"]`
- In Internet Explorer we can use the **item()** method like so  
`window.document.forms.item("myform")`


Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## Modern Access Solutions

- `document.getElementById()`
  - id is not a name replacement completely, think form fields (name-value pairs)
- `document.getElementsByClassName()`
- `document.querySelectorAll()`
- `$()` this is a wrapper function folks!
- Be careful though modern doesn't always equal better as we'll see...things are still a mess at times and speed is the main thing...if older works everywhere and is faster why avoid it?


Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## Event Models

- JavaScript reacts to user actions through event handlers (code associated with a particular event or object and event in the page)
- Common events include Click, MouseOver, MouseOut, etc.
- Events can be registered through HTML event handlers like onclick or via JavaScript directly
  - `<input type="button" value="press" onclick="alert('hi')">`
  - `document.onload = new Function("alert('hi')");`
- We'll see events primarily with links, form items and mouse movement


Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## All Together

- Once document objects are accessed either by user event or script event we can then modify the various properties of the elements.
- The following examples on the next slides show reading and writing of form fields as a demonstration of this.


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


CSE 134B Web Client Languages Lecture # 5

```

<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Meet and Greet</title>
<script type="text/javascript">

function sayHello()
{
var theirname=document.myform.username.value;
if (theirname != "")
alert("Hello "+theirname+"!");
else
alert("Don't be shy.");
}
</script></head><body>
<form name="myform" id="myform">
<b>What's your name?</b>
<input type="text" name="username" id="username" size="20"><br><br>
<input type="button" value="Greet" onclick="sayHello()">
</form>
</body>
</html>

```


Department of Computer Science and Engineering

---

---

---

---

---

---

---


---

CSE 134B Web Client Languages Lecture # 5

```

<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html><head><title>Meet and Greet 2</title>
<script type="text/javascript">
function sayHello()
{
var theirname = document.myform.username.value;
if (theirname != "")
document.myform.response.value="Hello "+theirname+"!";
else
document.myform.response.value="Don't be shy.";
}
</script></head><body>
<form name="myform" id="myform">
<b>What's your name?</b>
<input type="text" name="username" id="username" size="20">
<br><br>
<b>Greeting:</b>
<input type="text" name="response" id="response" size="40">
<br><br>
<input type="button" value="Greet" onclick="sayHello()">
</form></body></html>

```


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## The Object Models

- The next few slides present the various object models supported pre-standard DOM. In JavaScript 1 we focus primarily on the Netscape 3 DOM with some introduction to the non-standard DHTML object models.

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Specific Object Models: Netscape 3

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Specific Object Models: Netscape 4

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---


---

---

---

---

---

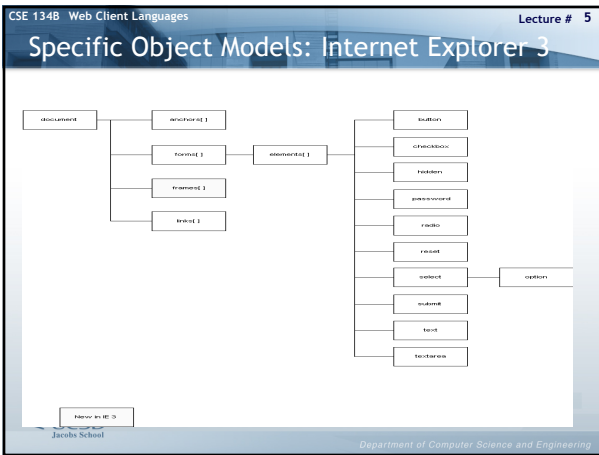


---

---

---

---

---

---


---

---

---

---

---

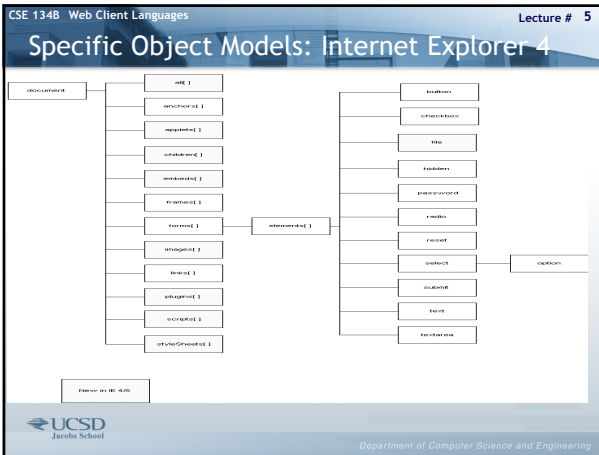


---

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

### The Cross Browser Nightmare

- The problem we face with JavaScript is that each object model is different
- Somehow we either have to find a common ground (traditional model), use object detection, use browser detection, pick a particular object model like IE and stick with it or just hope the standards work out
- We'll see with the rise of the Document Object Model (DOM) that someday maybe only certain BOM features will be non-standard and all browsers will have the same ability to manipulate page content.

UCSD Jacobs School  
 Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

---



CSE 134B Web Client Languages Lecture # 5

## The Standard Document Object Model

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

### DOM Flavors

- The Document Object Model or DOM is a standard that maps HTML and XML documents into objects for manipulation by scripting languages such as JavaScript
- The DOM comes in the following flavors:
  - DOM Level 0 – roughly equivalent to NS3’s object model. Often called traditional or classic object model
  - DOM Level 1 – Maps all the HTML elements and provides generic “node” manipulation features via the document object.
  - DOM Level 2 – Maps all CSS properties

*Note: The later DOM levels also support the earlier objects so “classic” scripts should work under DOM*

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

### DOM Flavors Contd.

- Another breakdown of the DOM is
  - DOM Core – core features for node manipulation (create, delete, movement, etc.)
  - DOM HTML – bindings to HTML tags (HTMLParagraph, etc.)
  - DOM CSS – bindings to CSS properties
  - DOM Events – event handling support
  - DOM XML – bindings to deal with user defined XML languages
- *Today’s modern browsers support DOM Core, DOM HTML, and a good portion of DOM CSS. However, DOM events and DOM XML are not consistently supported*

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


CSE 134B Web Client Languages Lecture # 5

## Document Trees

- The key to understanding the DOM is how an HTML document is modeled as a tree. Consider

```

<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head><title>DOM Test</title></head>
<body>
<h1>DOM Test Heading</h1>
<hr>
<!-- Just a comment -->
<p>A paragraph of <em>text</em> is just an example</p>
<ul>
<li><a href="http://www.yahoo.com">Yahoo</a></li>
</ul>
</body>
</html>
  
```


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---


---

CSE 134B Web Client Languages Lecture # 5

## Modeled Document Tree

**Legend**

- Text Node
- HTML ELEMENT
- Comment Node


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## Looking at the Tree

- The tree structure follows the structured nature of HTML. `<html>` tags encloses `<head>` and `<body>`. `<head>` encloses `<title>` and so on.
- Each of the items in the tree is called generically a node
- Notice that are different types of nodes corresponding to HTML elements, text strings, and even comments. The types of nodes relevant to most JavaScript programmers is shown on the next slide.


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Node Types

Node Type Number	Type	Description	Example
1	Element	An HTML or XML element.	<p>...</p>
2	Attribute	An attribute for an HTML or XML element.	align="center"
3	Text	A fragment of text that would be enclosed by an HTML or XML element	This is a text fragment!
8	Comment	An HTML comment	<!-- This is a comment -->
9	Document	The root document object, namely the top element in the parse tree	<html>
10	Document type	A document type definition	<!DOCTYPE HTML PUBLIC "-//W3C/DTD HTML 4.01 Transitional/EN" "http://www.w3.org/TR/html4/loose.dtd">

Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Node Relationships

- Look at the tree for
 

```
<p>A paragraph of <em>text</em> is just an example</p>
```

```

graph TD
  P[P] --- A[""A paragraph of""]
  P --- EM[EM]
  P --- B["is just an example"]
  EM --- C[""text""]
      
```

Notice that the **<p>** tag has three direct children and one "grandchild". Also make sure you understand the sibling and parent relationships. The DOM relies on them

Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Node Relationships Contd.

```

graph TD
  P[P] --- A[""A paragraph of""]
  P --- EM[EM]
  P --- B["is just an example"]
  EM --- C[""text""]
  A -.->|next sibling| EM
  EM -.->|previous sibling| B
      
```

Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Accessing Nodes

- The easiest way to access nodes in a document tree is via the `getElementById()` method for the **Document** object.
- In order to use the method we need to name our tags using the core attribute **id** like so  

```
<p id="p1" align="center">A paragraph of
<em>text</em> is just an example</p>
```

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---


---

CSE 134B Web Client Languages Lecture # 5

## Accessing Nodes Contd.

- Using `document.getElementById('p1')` we are returned an DOM **Element** object that corresponds to the appropriate node in the tree.

```
var currentElement = document.getElementById("p1");
var msg = "nodeName: "+currentElement.nodeName+"\n";
msg += "nodeType: "+currentElement.nodeType+"\n";
msg += "nodeValue: "+currentElement.nodeValue+"\n";
alert(msg);
```



UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Accessing Nodes Contd.

- Notice the node value to be *1* (an element), the type *P* corresponding to the HTML `<p>` tag, and the **nodeValue** is *null*.
- The reason for the *null* value is that you have to look at a text node to see the text within the parent tag. We now need to learn how to move around the tree. Fortunately there are some generic node properties that make this very easy as summarized on the next slide.

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## DOM Node Properties

DOM Node Properties	Description
nodeName	Contains the name of the node
nodeValue	Contains the value within the node, generally only applicable to text nodes
nodeType	Holds a number corresponding to the type of node, as given in Table 10-1
parentNode	A reference to the parent node of the current object, if one exists
childNodes	Access to list of child nodes
firstChild	Reference to the first child node of the element, if one exists
lastChild	Points to the last child node of the element, if one exists
previousSibling	Reference to the previous sibling of the node; for example, if its parent node has multiple children
nextSibling	Reference to the next sibling of the node; for example, if its parent node has multiple children
attributes	The list of the attributes for the element
ownerDocument	Points to the HTML <b>Document</b> object in which the element is contained


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

---


---

CSE 134B Web Client Languages Lecture # 5

## Basic Movement

- Using the common node properties you should be able to move around a tree that you know the structure of
 

```
var currentElement = document.getElementById("p1");
currentElement = currentElement.firstChild;
currentElement = currentElement.nextSibling;
currentElement = currentElement.parentNode;
```
- This simple script would end up right were it started from assuming that the starting node had at least two children.


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

---

---


CSE 134B Web Client Languages Lecture # 5

## Basic Movement Contd.

- We need to be careful though when we don't know the tree structure ahead of time
- Use simple conditionals to protect yourself from moving "off" tree
 

```
if (current.hasChildNodes())
  current = current.firstChild;

if (current.parentNode)
  current = current.parentNode;
```
- You should be able to easily write a safe tree traversal system once you know the core properties and how to do if statements


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## getElementsByName

- Related to `getElementById( )` is the DOM method `getElementsByName( )` which deals with HTML elements identified by the name attribute including: `<form>`, `<input>`, `<select>`, `<textarea>`, `<img>`, `<a>`, `<area>`, and `<frame>`
- Elements using **name** actually didn't have to have globally unique names thus the DOM method `getElementsByName( )` returns a list of nodes with the passed name as shown here looking for something called 'mytag'

```

tagList = document.getElementsByName('myTag');
for (var i = 0; i < tagList.length; i++)
    alert(tagList[i].nodeName);

```

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## getElementsByClassName and Other Ideas

- These methods are NOT part of the DOM standard yet but are part of HTML5 however even if not it is relatively easy to implement them
  1. Find all elements in the tree via a walk
  2. Compare the class values with the class or selector being searched for
  3. If compares add to return list else move on
- Of course while it would be easy enough to implement such routines their performance can be quite slow on large documents
- Most all browsers now implement `getElementsByClassName` natively so you should use an if to see if this feature is in place before using your own. We also note that `querySelectorAll( )` and similar library defined functions (ex. `$()`) allow us to find elements by CSS selector for example `$(p.foo > em)` might return a list of elements that meet this CSS rule

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Traditional JavaScript Collections

- For backwards compatibility the DOM supports some object collections such as `document.forms[ ]`, `document.images[ ]` and so forth which were commonly supported amongst JavaScript aware browsers.

Collection	Description
<code>document.anchors[ ]</code>	A collection of all the anchors in a page specified by <code>&lt;a name=""&gt; &lt;/a&gt;</code>
<code>document.applets[ ]</code>	A collection of all the Java applets in a page
<code>document.forms[ ]</code>	A collection of all the <code>&lt;form&gt;</code> tags in a page
<code>document.images[ ]</code>	A collection of all images in the page defined by <code>&lt;img&gt;</code> tags
<code>document.links[ ]</code>	A collection of all links in the page defined by <code>&lt;a href=""&gt; &lt;/a&gt;</code>

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5


## Generalized Element Collections

- Under the DOM you can create an arbitrary collection of elements using `getElementsByTagName()`

```
allParagraphs = document.getElementsByTagName('p');
```

- You can use many of these methods on nodes themselves to find the elements within a particular element

```
allParagraphsInBody = document.body.getElementsByTagName('p');
para1=document.getElementById('p1');
emElements = para1.getElementsByTagName('em');
```

 UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## Common Tree Starting Points

- Rather than using a built-in collection or a named starting point you may simply want to start at a well know common tree position such as :
- `document.documentElement`
  - should be the `<html>` tag
- `document.body`
  - `<body>` tag
- `document.doctype`
  - should be the `<!doctype>` statement but may not be and has limited value

 UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Creating Nodes

- You can create nodes and then insert them into the document tree


```
newNode = document.createElement('p');
```

- Of course you may have to then create text nodes to put inside of elements

```
newText = document.createTextNode('Hello there');
```

- Then we will attach things together and attach to the document

```
newNode.appendChild(newText);
document.body.appendChild(newNode);
```

 UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## Create Node Methods

Method	Description	Example
<code>createAttribute(name);</code>	Creates an attribute for an element specified by the string <i>name</i> . Rarely used with existing HTML elements since they have predefined attribute names that can be manipulated directly.	<code>myAlign = document.createAttribute("align");</code>
<code>createComment(string);</code>	Creates an HTML/XML text comment of the form <code>&lt;!-- string --&gt;</code> where <i>string</i> is the comment content.	<code>myComment = document.createComment("Just a comment");</code>
<code>createElement(tagName)</code>	Creates an element of the type specified by the string parameter <i>tagName</i>	<code>myHeading = document.createElement("h1");</code>
<code>createTextNode(string)</code>	Creates a text node containing <i>string</i> .	<code>newText = document.createTextNode("Some new text");</code>


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5


## Insert and Append Methods

- The two methods for node attaching are `insertBefore(newChild, referenceChild)` and `appendChild(newChild)`
- These methods run on a node object, for example

```

newText = document.createTextNode('Hi!');
currentElement = document.body;
insertPt = document.getElementById('p1');
currentElement.insertBefore(insertPt,newText);

```


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5


## Copying Nodes

- Use the `cloneNode( )` method to make a copy of a particular node. The method take a Boolean argument which indicates if the children of the node should be cloned (a deep clone) or just the node itself

```

var current = document.getElementById('p1');
newNode = current.cloneNode();
newSubTree = current.cloneNode(true);

```


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---



CSE 134B Web Client Languages Lecture # 5

## Deleting Nodes

- The Node object's `removeChild(child)` method is useful to delete a node out of the tree. You need to run this node on the parent of the object you are interested in deleting

```
var current = getElementById('p1');
currentParent = current.parentNode;
currentParent.removeChild(current);
```

- Note: The `removeChild()` method does return the node object removed.*

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Replacing Nodes

- You can also replace a node using `replaceChild(newchild, oldChild)`
- The `replaceChild()` method will destroy the contents of the node replace and does not side effect the old value

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Modifying Nodes

- You can't modify an element directly but you can modify its contents particularly text nodes. Given `<p id="p1">This is a test</p>`

Use `document.getElementById('p1').firstChild;` then set the textNode's data property `textNode.data = "I've been changed!"`;

- There are a variety of DOM methods like `appendData()`, `deleteData()`, `insertData()`, `replaceData()`, `splitText()`, and `substringData()` that can be used, but since the data value is just a string you might want to resort to commonly understood String object methods.

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---


CSE 134B Web Client Languages Lecture # 5

## Modifying Attributes

- Attributes can be manipulated by DOM methods like `getAttribute(name)`, `setAttribute(attributeName, attributeValue)` and `removeAttribute(attributeName)` that work off a particular `Node` object. You can also check for the existence of attributes using the `hasAttributes()` method.
- Most people do not use these DOM methods but directly modify the attributes of the tag like so
 

```
<p id="p1" align="left">This is a test</p>
```
- You would use
 

```
current = document.getElementById('p1');
current.align = 'right';
```


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## The DOM and HTML

- What you should begin to recognize now is the key to the DOM in most Web pages is understanding HTML
- The various properties of a node correspond directly to its HTML attributes. For example given a paragraph tag `<p>` it corresponds to an `HTMLParagraphElement` with the following properties `align`, `id`, `className`, `title`, `lang`, and `dir`. Notice the mapping from HTML attributes to object properties is nearly one-to-one except for some situations like the `class` attribute which would be a reserved word and thus is renamed `className` under the DOM.
- Two word attributes like `tabindex` are represented in the DOM in typical programming camel back form (e.g. `tabindex`)


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## The DOM and HTML

- The ramification of this relationship between HTML and JavaScript via the DOM is that the language can now manipulate any arbitrary HTML element in anyway, but it does require a well formed document otherwise the results can be somewhat unpredictable
- Suddenly, knowing how to do HTML properly actually matters. Even WYSIWYG editors will have to be modified to ensure 100% validatable markup to ensure correct JavaScript operation
- The intersection with CSS is very similar and covered under DOM Level 2


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5


## The DOM and CSS

- The **style** attribute for an HTML element allows style sheets properties to be set inline. The DOM allows access to this attribute's value, for example given
 

```
<p id="p1" style="color: red">Test</p>
```

 then
 

```
theElement = document.getElementById('p1');
theElement.style.color = 'green';
```
- What we see is like HTML the various CSS properties map to DOM names directly, so **font-size** becomes **fontSize**, **background-color** becomes **backgroundColor**, and so on. There are only one or two exceptions to this conversion.


Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## The DOM and CSS Contd.

- We can manipulate the **className** and **id** properties of an element as well to effect a style sheet change
- We can access the complete style sheet using the `document.styleSheets[ ]` collection and then looking at the `cssRules[ ]` collection within each **<style>** tag. You can `addRule()`, `removeRule()` and `insertRule()` on a given style sheet as well as change the various properties and values.
- Be careful this aspect of the DOM Level 2 is poorly implemented so far in browsers and in IE you may find that non-standard approaches work better


Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## DOM Conclusions

- The DOM represents the possibility for easier cross-browser scripting, but it also requires mastery of CSS and HTML to be used properly
- Some aspects of the BOM are actually easier to use than the DOM
  - Consider creating nodes or manipulating text contents, some programmers find using properties like `innerHTML`, `innerText`, `outerText`, and `outerHTML` to be far easier than making nodes one by one
- A great deal of legacy code using BOM objects like IE's `document.all[ ]` style exist and would have to be ported. This will take time!


Department of Computer Science and Engineering

---

---

---

---

---


---

---

---

CSE 134B Web Client Languages Lecture # 5

## Event Models



Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

### Traditional Event Model

- Event Binding with HTML attributes
  - `<p onclick="alert('Stop that!');">Click me if you can!</p>`
  - Casing often camel case in old style HTML - `<p onClick="...">`
  - As HTML attributes case doesn't matter, these are part of HTML standard
  - HTML4 defines: `onblur`, `onchange`, `onclick`, `ondblclick`, `onfocus`, `onkeydown`, `onkeypress`, `onkeyup`, `onload`, `onmousedown`, `onmousemove`, `onmouseout`, `onmouseover`, `onmouseup`, `onreset`, `onselect`, `onsubmit`, and `onunload`
  - Example: [http://www.w3schools.com/html/html\\_events.asp](http://www.w3schools.com/html/html_events.asp)



Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

### HTML5 Event Attributes

- HTML5 introduces a number of events some of which are IEisms and some new to handle native audio/video and markup based form checking
- Some of interest: `oncontextmenu`, `ondrag`, `ondrop`, `oninput`, `oninvalid`, `onmousewheel`, `onplay`, `onprogress`, `onratechange`, `onreadystatechange`, `onseeked`, `onafterprint`, `onbeforeprint`, `onprint`, `onbeforeunload`, `onerror`, `onhashchange`, `onmessage`, `ononline`, `onoffline`, `onpopstate`, `onscroll`, `onstorage`
- The book has a full discussion, but given the transitory nature of HTML5 likely there are a number of new ones



Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Traditional Event Binding

- Simple Example

```

<p id="p1">Please click me!</p>
<script>
document.getElementById("p1").onclick = function ()
{
    alert("Hey stop clicking me!");
};
</script>

```

- Must wait for element to be defined,
- Can't do multiple binds obviously

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Traditional Event Binding

- Wouldn't work - just second fires

```

<p id="p1">Please click me!</p>
<script>
function click1() { alert("First click handler"); }
function click2() { alert("Second click handler"); }
window.onload = function () {
    document.getElementById("p1").onclick = click1;
    document.getElementById("p1").onclick = click2;
};

```

- Can fix in code if you controlled it

```

document.getElementById("p1").onclick = function ()
{ click1(); click2(); };

```

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Old Multi-Bind Solution

- Easy enough to address the multi-bind problem
- Make a function that checks current handler & makes new function with old & new handler added to it.
- Example: <http://javascriptref.com/3ed/ch11/oldmultieventbind.html>

```

function addEvent(obj,event,handler) {
var oldHandler = obj[event];
if (typeof obj[event] != "function") {
    obj[event] = handler;
} else { obj[event] = function () {
    if (oldHandler) { oldHandler.apply(); }
    handler.apply();
}}};

```

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## Event Handler Scope Details

- ```
<script>
window.id = "theWindow";
</script>
<p id="theParagraph" onmouseover="alert(this.id);">Mouse over me!</p>
```
- ```
<script>
window.id = "theWindow";
function showID() { alert(this.id); }
</script>
<p id="theParagraph" onmouseover="showID();">Mouse over me!</p>
```
- ```
<script>
window.id = "theWindow";
function showID(el) { alert(el.id); }
</script>
<p id="theParagraph" onmouseover="showID(this);">Mouse over me!</p>
```


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


CSE 134B Web Client Languages Lecture # 5

## Return Values

- Returning true or false to an event handler can change the default behavior

```
<a href="http://www.google.com/" onclick="return false;">
Try to leave</a>
<a href="http://www.w3.org/" onclick="return
confirm('Leave site and proceed to W3C?');">W3C</a>
```

```
<form action="handleform.php" onsubmit="return
validateForm(this);">
<!-- form details omitted -->
</form>
```


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


CSE 134B Web Client Languages Lecture # 5

## Firing Events Manually

- In general you can fire an event that a user can trigger themselves

```
<form name="form1">
<input type="button" name="button1" value="Press Me"
onclick="alert('Hey there');">
</form>
<script>
// click the button programmatically
document.form1.button1.click();
</script>
```

- For security reasons some things are not triggerable or not in the same manner as the user would issue it - ex: file upload, mouse movement


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Overview of Modern Event Models

Feature	Traditional Model	Netpage 4 Model	Internet Explorer 4-8 Model	XHTML Model
To bind a handler	HTML attribute or direct assignment obj.onEvent = function	HTML attribute captureEvents()	HTML attribute, attachEvent()	HTML attribute addEventListener()
To detach a handler...	Set HTML attribute to null with script	Set HTML attribute to null with script, onLeaveEvents()	Set HTML attribute to null with script, detachEvent()	Set HTML attribute to null with script, removeEventListener()
The event object...	N/A	Implicitly available as event, its attribute text, passed as an argument to handlers bound with JavaScript	Available as window.event	Passed as an argument to handlers
To cancel the default action...	Return false	Return false	Return false	Return false, preventDefault()
How events propagate	N/A	From the Window down to the target	From the target up to the Document	From the Document, down to the target and then back up to the Document
To stop propagation...	N/A	N/A	cancelBubble	stopPropagation()
To redirect an event...	N/A	onCaptureEvents()	onLoadEvents()	captureEvents()

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Overview of Modern Event Models Contd.

Events start here and route down

↓

↓

↓

↓

↓

↓

WINDOW

DOCUMENT

Enclosing Element 1

Enclosing Element 2

Enclosing Element n

Dom Node where event occurs

↑

↑

↑

↑

↑

↑

Events start here and bubble up

Dom events go either way, but are usually handled in "bubble up" fashion.

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Internet Explorer's Proprietary Model

- attachEvent() and detachEvent()
- object.attachEvent("event to handle", eventHandler);
- object.detachEvent("event to stop handling", eventHandler);
- Examples
  - <http://javascriptref.com/3ed/ch11/attachevent.html>
  - <http://javascriptref.com/3ed/ch11/detachevent.html>

UCSD Jacobs School Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## IE Model Contd. - Event Object

- Transient Event object made available via a global variable event
- The event object contains values like
  - Event target values like srcElement, fromElement, toElement
  - Pixel coordinates (clientX, clientY, screenX, screenY, x, y)
  - Modifier keys - altKey, shiftKey, keyCode, ctrlKey
- Example: <http://javascriptref.com/3ed/ch11/eventattrib.html>

 Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5


## IE Model Contd. - Event Bubbling

```

<script>
function gotClick(who) {
  document.getElementById("results").innerHTML += who + " got the click <br>";
}
</script>
</head>
<body onclick="gotClick('body');">
<table onclick="gotClick('table');"> <tr onclick="gotClick('tr');">
  <td onclick="gotClick('td');"><p onclick="gotClick('p');">Click on the <b
onclick="gotClick('b');">BOLD TEXT</b> to watch bubbling in action!
</p> </td></tr></table><hr> <br>
<p id="results"> </p>
</body>

```

- Example: <http://javascriptref.com/3ed/ch11/bubble.html>

 Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## IE Model Contd. - Event Creation

- `var myEvent = document.createEventObject([eventObjectToClone])`
- `var evt = document.createEventObject (window.event);`  
`evt.button = 1;`  
`evt.clientX = Math.floor(Math.random()*800);`  
`evt.clientY = Math.floor(Math.random()*600);`
- Then send event with `fireEvent()`  
`document.body.fireEvent("onclick", evt);`
- Example: <http://javascriptref.com/3ed/ch11/eventsIE.html>

 Department of Computer Science and Engineering

---

---

---

---

---

---

---


---



CSE 134B Web Client Languages Lecture # 5

## DOM Event Model - Adding Events

- `object.addEventListener(event, handler, capturePhase);` where:
  - `object` is the node to which the listener is to be bound.
  - `event` is a string indicating the event it is to listen for.
  - `handler` is the function that should be invoked when the event occurs.
  - `capturePhase` is a Boolean indicating whether the handler should be invoked during the capture phase (true) or bubbling phase (false).
- Example: <http://javascriptref.com/3ed/ch11/addeventlistener.html>
- Note: You are in charge of tracking what listeners are bound - no `listListeners()`

 Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## DOM Event Model - Removing Events

- `object.removeEventListener(event, handler, capturePhase);` where:
  - `object` is the node to which the listener is to be removed.
  - `event` is a string indicating the event it is to stop listening for.
  - `handler` is the function that should be removed when the event occurs.
  - `capturePhase` is a Boolean indicating whether the handler should be invoked during the capture phase (true) or bubbling phase (false).
- Example: <http://javascriptref.com/3ed/ch11/removeeventlistener.html>

 Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## Event Model Abstraction = POC


```

function addListener(obj, eventName, listener) {
  if (obj.addEventListener) {
    obj.addEventListener(eventName, listener, false);
  } else {
    obj.attachEvent("on" + eventName, listener);
  }
}

function removeListener(obj, eventName, listener) {
  if (obj.removeEventListener) {
    obj.removeEventListener(eventName, listener, false);
  } else {
    obj.detachEvent("on" + eventName, listener);
  }
}

var el = document.getElementById('p1');
addListener(el, "click", handleClick);

```

 Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## DOM Event Model - Event Object

- The DOM Event object contains similar items to the IE Event object (pixel, key, target element, etc.) though the names are slightly different
- See Table 11-8 - p. 446 for info and note bubbles, cancelable, currentTarget, eventPhase, isTrusted, relatedTarget, timeStamp, target, and type
- A big difference is that you do not access this object using a global variable instead it is passed to the event handler function being invoked
- Example: <http://javascriptref.com/3ed/ch11/eventattribs.html>


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5

## DOM Event Model - Event Control


- Preventing Default Actions is beyond just returning false

```

<p>Try clicking <a href="http://www.javascriptref.com">this link</a>.</p> <form action="http://www.javascriptref.com" method="get">
<input type="submit" value="submit me">
</form>
<script>
function killClicks(event) { event.preventDefault(); }
// kill all default click actions!
document.addEventListener("click", killClicks, true);
</script>

```

- Note though that the event may not cause the default action but it will continue up the DOM tree unless told otherwise


Department of Computer Science and Engineering

---

---

---

---

---

---


---


---

CSE 134B Web Client Languages Lecture # 5

## DOM Event Model - Event Control Contd.

- You can control the propagation of an event using `event.stopPropagation()`
- Example: <http://javascriptref.com/3ed/ch11/stoppropagation.html>
- Of course as shown here the direction of propagation changes depending on how you decide to register the event




Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## DOM Event Creation

- Synthetic events made with `document.createEvent()`  
`evt = document.createEvent("HTMLEvents");`
- Once created you make the event passing it a variety of values to populate the event object properly  
`evt.initEvent("click", "true", "true");`  
`// this syntax can get wild`
- Finally find a node and dispatch the event to it  
`currentNode.dispatchEvent(evt);`
- Example:  
<http://javascriptref.com/3ed/ch11/createevent.html>

 Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


CSE 134B Web Client Languages Lecture # 5

## DOM4 Event Creation Changes

- Making events in the DOM is one of its more convoluted areas
- DOM4 introduces a more sensible event constructor syntax.

```
document.getElementById("p2").addEventListener("mouse
over", function () { var evt = new Event("click",
{bubbles:true, cancelable:true});
document.getElementById("p1").dispatchEvent(evt);},
false);
```

- Example: <http://javascriptref.com/3ed/ch11/createevent-constructor.html>
- Syntax has changed but not really functionality and developers should be cautious for browser support with this approach

 Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## DOM Event Notes - isTrusted

- Events generated by browser or direct user action are "trusted" and thus `isTrusted` property on Event object is true
- Synthetic events are triggered by code (maybe malicious XSS) so they are not trusted and `isTrusted` is false.
- Example: <http://javascriptref.com/3ed/ch11/istrusted.html>
- Do not be naive though reliance on this property and code that may check it is dubious given the dynamic nature of JavaScript

 Department of Computer Science and Engineering

---

---

---

---

---

---

---


---

CSE 134B Web Client Languages Lecture # 5

## Event Types - Mouse Events

- Mouse events are defined under the MouseEvent interface and include:  
click, dblclick, mousedown, mouseenter, mouseleave, mousemove, mouseout, mouseover, mouseup
- Example: <http://javascriptref.com/3ed/ch11/mouseevents.html>
- Creation of mouse events is messy!  

```
var evt = document.createEvent("MouseEvent");
    evt.initMouseEvent(type, bubbles, cancelable, view, detail, screenX,
    screenY, clientX, clientY, ctrlKey, altKey, shiftKey, metaKey,
    button, relatedTarget)
```
- Example: <http://javascriptref.com/3ed/ch11/createmouseevents.html>
- Mouse wheel handling is troubling: <http://javascriptref.com/3ed/ch11/mouse-wheel.html>


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---

---

---

CSE 134B Web Client Languages Lecture # 5


## UI Events

- "UI event" includes:  
DOMActivate, abort, error, load, resize, scroll, select, and unload
- Synthetic UI events are a bit easier than some  

```
var evt = document.createEvent("UIEvent");
    evt.initUIEvent(type, bubbles, cancelable, views, detail);
```

where  
*type* is a string representing the particular event to create, such as "DOMFocusIn".  
*bubbles* is a Boolean value indicating whether or not the event should bubble.  
*cancelable* is a Boolean value indicating whether or not the event should be cancelable.  
*view* is the event's AbstractView. You should pass the Window object here.  
*detail* indicates event-specific details for the spawned event.

- Example: <http://javascriptref.com/3ed/ch11/ui-events.html>


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

## Other Events

- Keyboard  
Events: <http://javascriptref.com/3ed/ch11/keyboardevents.html>
- Text Events: <http://javascriptref.com/3ed/ch11/textinput.html>
- Mutation  
Events: <http://javascriptref.com/3ed/ch11/mutationevents.html>
- Non-Standard Events:  
<http://javascriptref.com/3ed/ch11/oncopy.html>
- Custom  
Events: <http://javascriptref.com/3ed/ch11/customevent.html>  
<http://javascriptref.com/3ed/ch11/customevent-creator.html>
- onbeforeunload, onreadystatechange, onhashchange, onmessage


Department of Computer Science and Engineering

---

---

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

### Library Rise Phase 1

- Well you can write this native DOM but that is no fun. Maybe you want to smooth things out?
- 1<sup>st</sup> Gen Libraries - Solved browser inconsistencies in the DOM, Events and Ajax
  - jQuery, YUI, Prototype, MooTools, etc. (jQuery won!)
- Time passes and things change
  - Too much success leads to problems
    - Sloppy Inclusions and Bad Code Flow (thus need structure)
    - DOM no longer a big deal smoothing but updating becomes problem (remove some stuff, add virtual DOM)
    - Things get slow (remove stuff, go native instead)

 Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

### Library Rise Phase 2

- 2<sup>nd</sup> Generation Libraries
  - AngularJS, Ember, React, VueJS, etc.
- More focused on larger scale app building
  - MVC pattern focused (maybe not a hot idea)
  - Just the patterns and conventions though are helpful
- Databinding and updating become a big deal
- Overhead starts to become a more serious problem

 Department of Computer Science and Engineering

---

---

---

---

---

---


---

---

CSE 134B Web Client Languages Lecture # 5

### Back to the Native? Phase 3

- Today we see that native components (Custom Elements, Shadow DOM, etc.) might blow out what many frameworks do
  - Ex: Polymer (React, VueJS, and Angular all pointing way as well)
- The mobile constraint is showing that frameworks may not be worth it (depending on situation)
- But the network is taking center stage again (cue Ajax lecture!)

 Department of Computer Science and Engineering

---

---

---

---

---

---

---

---